



地址:安徽宁国经济技术开发区河沥园区桥西路
国际业务部:0086-573-83882301
国际业务部传真:0086-573-83882300
国内业务部:0086-573-83882305
国内业务部传真:0086-573-83882307
邮编:314002
邮箱:xtcaster@jxcaster.com
官网:www.teng-medical.com

Address: Qiaoxi Road,heli Park, Ningguo Economic andTechnological
Development Zone, Anhui Province
International Business Department:0086-573-83882301
Fax of international business department:0086-573-83882300
Domestic business department:0086-573-83882305
Fax of domestic business department:0086-573-83882307
Postal Code:314002
Email : xtcaster@jxcaster.com
Official website:www.teng-medical.com



医疗系列脚轮
MEDICAL SERIES CASTERS

TAIKAIFO®

安徽兴腾物流设备有限公司
ANHUI XINGTENG LOGISTICS EQUIPMENT CO., LTD.


公司简介 ABOUT US

安徽兴腾物流设备有限公司，是一家专业生产脚轮、塑料购物车等物流设备的企业，创立于1997年。工厂占地面积30000余平方米，公司拥有全自动精密注塑机、自动冲床、铆钉机、自动组装机等设备一百一十余台。同时拥有自己的脚轮实验室，脚轮行走测试设备，脚轮冲击测试设备，静压测试、硬度测试、刹车寿命测试设备，电镀盐雾测试设备等，年生产各类脚轮一千万只。公司通过了ISO9001质量认证，多种产品通过TUV认证检验，目前公司产品有二十余个系列，两千余种产品。"用户至上，质量第一"是兴腾公司的宗旨。我们将致力于各类新产品的开发来满足市场的需求。热诚欢迎广大客户与兴腾携手同图鸿业。



Anhui Xingteng Logistics Equipment Co. Ltd., an enterprise specializing in the production of casters, was founded in 1997. The factory covers an area of morethan 30000 square meters. The company has more than 110 sets of automatic precision injection molding machines, automatic punches, rivet machines, auto-matic assembly machines and other equipments. At the same time, we have our own caster laboratories,dynamic loading capacity equipment, caster impact test equipment, static pressure test, hardness test, brake life test equipment, electroplating salt spray test equipment, etc., with an annual production of 10 million casters. The company has passed ISO9001 quality certification, and a variety of products have passed TUV certification inspection. At present, the company's products have more than 20 series and more than 2000 kinds of products. "Customer first, quality first" is the purpose of Xingteng company. We will devote ourselves to the development of all kinds of new products to meet the needs of the market. We sincerely welcome our customers to join with Xingteng.

企业荣誉
CORPORATE HONORS

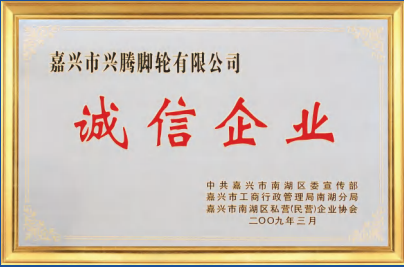

企业专利
CORPORATE PATENT



GOODS CODING TABLE
货品编码表

TYPES OF WHEELS 轮子种类	WHEEL SIZE 轮子尺寸	WHEEL TYPE 轮子类型	MOUNTING TYPE 装配方式	WHEEL MATERIAL 轮子材质	STYLE NUMBER 款式编号
SINGLE WHEEL D 单轮	2 2" 2 2寸	SWIVEL S 活动	1 PLATE 1 平板	POLYPROPYLENE P 聚丙烯	NO.1 01
DOUBLE-ROW WHEEL S 双排轮	7 2.5" 7 2.5寸	POSILOC BRAKE P 正刹	2 STEM 2 丝杆	POLYURETHANE U 聚氨酯	NO.2 02
	3 3" 3 3寸	DOUBLE BRAKE D 叠刹	3 ROUND STEM 3 插杆	THERMOPLASTIC RUBBER E 人造胶	NO.3 03
	4 4" 4 4寸		4 CENTRAL CONTROL 4 中控	NYLON N 尼龙	NO.4 04
	5 5" 5 5寸		5 EXPANSION TUBE 5 膨胀管		NO.5 05
	6 6" 6 6寸		6 HOLLOW KINGPIN 6 空心铆钉		NO.6 06
	8 8" 8 8寸				NO.7 07

泰凯福®

CONTENTS
目录

01	公司简介 /COMPANY PROFILE	01-02
02	企业荣誉/专利 /CORPORATE HONORS /PATENTS	03-04
03	货物编码表 /GOODS CODING LIST	05-06
04	T1系列单片医疗轮 /T1 SERIES SINGLE-WHEEL MEDICAL CASTERS	07-08
05	T2系列单片静音医疗轮 /T2 SERIES SILENT SINGLE-WHEEL MEDICAL CASTERS	09-10
06	T3系列中控高级静音医疗轮 /T3 SERIES CENTRAL CONTROL HIGH-GRADE SILENT MEDICAL CASTERS	11-12
07	T4系列防尘医疗轮 /T4 SERIES DUST-PROOF MEDICAL CASTERS	13-15
08	T5系列双排医疗轮 /T5 SERIES DOUBLE-ROW MEDICAL CASTERS	16-17
09	T6系列全塑双片医疗轮 /T6 SERIES FULL-PLASTIC DOUBLE-WHEEL MEDICAL CASTERS	18-19
10	T7系列中空双片医疗轮 /T7 SERIES HOLLOW DOUBLE-WHEEL MEDICAL CASTERS	20-21
11	T8系列全塑精密轴承双片医疗轮 /T8 SERIES FULL-PLASTIC PRECISION BEARING DOUBLE-WHEEL MEDICAL CASTERS	22-24
12	T9系列豪华全塑单片医疗轮 /T9 SERIES DELUXE FULL-PLASTIC SINGLE-WHEEL MEDICAL CASTERS	25-26
13	T10系列全塑双片医疗轮 /T10 SERIES FULL-PLASTIC DOUBLE-WHEEL MEDICAL CASTERS	27-28
14	T11系列全塑双片医疗轮 /T11 SERIES FULL-PLASTIC DOUBLE-WHEEL MEDICAL CASTERS	29-30
15	T12系列全塑精密轴承双片医疗轮 /FULL-PLASTIC PRECISION BEARING DOUBLE-WHEEL MEDICAL CASTERS	31-32
16	T13系列TPE静音医疗轮 /T13 SERIES TPE SILENT MEDICAL CASTERS	33-34

泰凯福®

T1
SERIES

产品特点

T1系列具有优异的静音表现、灵活的转向性能和良好的防腐防缠绕特性，能为您的医疗仪器、电子推车、视听设备等带来静音顺滑、超长耐用的增值服务。

1. 主体采用优质增强尼龙，搭配工程聚丙烯轮芯与高弹性热塑弹性体轮胶，结构强度可靠，全部材料均为抗菌、抗老化、防腐蚀材质，适配复杂使用环境。
2. 搭配精密轴承结构，推行轻松省力，转向灵活轻便；高弹性轮面具备超静音特性，不损伤地面，适配噪音敏感场景。
3. 全塑一体化全包式设计，可有效抵御地面毛线、纤维缠绕，无金属生锈风险，防腐性能优良，日常清洁维护便捷。

适用范围

医疗仪器、电子仪器、病床视听设备等多种行业领域。



Product features

T1 series has excellent silent performance, flexible steering performance and good anti-corrosion and anti-winding properties. It can bring silent, smooth, ultra-long and durable value-added services to your medical instruments, electronic carts, audio-visual equipment, etc.

1. The main body is made of high-quality nylon, with an engineered polypropylene wheel core and high-elastic thermoplastic rubber wheel. The structural strength is reliable. All materials are antibacterial, anti-aging, and anti-corrosion, suitable for complex use environments.
2. Equipped with a precision bearing structure, the steering is easy and labor-saving, and the steering is flexible and light. The highly elastic wheel surface has ultra-quiet characteristics and does not damage the ground, making it suitable for noise-sensitive scenes.
3. The all-plastic integrated all-inclusive design can effectively resist the entanglement of wool and fibers on the ground. There is no risk of metal rust. It has excellent anti-corrosion performance and is convenient for daily cleaning and maintenance.

Applications

Medical instruments, electronic instruments, hospital bed audio-visual equipment.



型号								
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Plate Size 平板尺寸(mm)	Hole centres 孔距(mm)	Hole diameter 孔直径(mm)	Load Capacity 载重(kg)
D3S1E01	75	22	TPE	115	80*60	58*40	9*12	60
D4S1E01	100	28	TPE	153	80*60	58*40	9*12	80
D5S1E01	125	30	TPE	180	96*70	74*45	9*12	100



型号								
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Plate Size 平板尺寸(mm)	Hole centres 孔距(mm)	Hole diameter 孔直径(mm)	Load Capacity 载重(kg)
D3P1E01	75	22	TPE	115	80*60	58*40	9*12	60
D4P1E01	100	28	TPE	153	80*60	58*40	9*12	80
D5P1E01	125	30	TPE	180	96*70	74*45	9*12	100



型号						
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Central Control Size 中控尺寸(mm)	Load Capacity 载重(kg)
D3S5E01	75	22	TPE	115	φ22*25	60



型号						
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Central Control Size 中控尺寸(mm)	Load Capacity 载重(kg)
D3P5E01	75	22	TPE	115	φ22*25	60

泰凯福®

T2
SERIES



产品特点

T2系列具有优异的承重性能、静音特性和耐腐蚀表现，能为您的高档医疗设备、重载设备推车等带来安全稳定、超长耐用的增值服务。

- 1. 主体为高品质增强尼龙加厚款，大幅提升结构强度，具备优异的抗冲击、耐腐蚀性能，适配高承载需求场景。
- 2. 轮子采用超强热塑性弹性体材质制成，搭配加宽胎面，具有承载高、启动轻便、耐磨抗老化、超静音的特点，行走更稳定。
- 3. 采用内嵌喷入式双重密封防锈深沟球精密静音轴承，转向灵活顺滑，密封性能优异，搭配耐高温油脂，有效延长使用寿命。

适用范围

重载医疗仪器、工业设备推车、实验室仪器等多种高承载行业领域。

Product features

T2 series has excellent load-bearing performance, silent characteristics and corrosion resistance, and can bring safe, stable, long-lasting and durable value-added services to your high-end medical equipment, heavy-duty equipment carts, etc.


- 1. The main body is made of thickened high-quality nylon, which greatly improves the structural strength, has excellent impact resistance and corrosion resistance, and is suitable for scenarios with high load-bearing requirements.
- 2. The wheels are made of super strong thermoplastic rubber and have widened treads. They have the characteristics of high load-bearing, easy starting, wear-resistant and anti-aging, ultra-quiet, and more stable walking.
- 3. It adopts embedded spray-in double-sealed anti-rust deep groove ball precision silent bearings, with flexible and smooth steering and excellent sealing performance. It is matched with high-temperature resistant grease to effectively extend the service life.

Applications

Heavy-duty medical instruments, industrial equipment carts, laboratory instruments.



型号								
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Plate Size 平板尺寸(mm)	Hole centres 孔距(mm)	Hole diameter 孔直径(mm)	Load Capacity 载重(kg)
D3S1E02	75	32	TPE	115	80*60	60*40	9*12	80
D4S1E02	100	32	TPE	150	80*60	60*40	9*12	100



型号								
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Plate Size 平板尺寸(mm)	Hole centres 孔距(mm)	Hole diameter 孔直径(mm)	Load Capacity 载重(kg)
D3P1E02	75	32	TPE	115	80*60	60*40	9*12	80
D4P1E02	100	32	TPE	150	80*60	60*40	9*12	100



型号						
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Threaded Stem Size 丝杆尺寸(mm)	Load Capacity 载重(kg)
D3S2E02	75	32	TPE	115	M12*20	80
D4S2E02	100	32	TPE	150	M12*20	100



型号						
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Threaded Stem Size 丝杆尺寸(mm)	Load Capacity 载重(kg)
D3P2E02	75	32	TPE	115	M12*20	80
D4P2E02	100	32	TPE	150	M12*20	100

泰凯福®

T3
SERIES



产品特点

T3系列具有灵活的操控性能、可靠的制动表现与专利防缠绕特性，为您的高档医疗设备、智能推车等带来安全稳定、静音耐用的增值服务。

1. 采用30度和45度工作角度设计，搭配内置刹车结构，节省空间且便于操作，新款优化设计减少了零件数量，性能更稳定可靠。

2. 轮子采用高品质TPU轮胶制成，耐腐蚀、抗老化、抗菌性能优良；搭配内嵌喷入式双重密封防锈深沟球精密静音轴承，行走顺畅、转向灵活，静音效果突出。

3. 配合30度和45度短行程制动，可实现精准令行禁止的制动效果；搭载自有防缠绕结构，有效防止灰尘和杂物进入，减少维护成本。

适用范围

医疗设备、智能推车、精密仪器等多种行业领域。

Product features

T3 series has flexible control performance, reliable braking performance and patented anti-winding characteristics. It can bring safe, stable, silent and durable value-added services to your high-end medical equipment, smart carts, etc.

1. Designed with 30-degree and 45-degree working angles and built-in brake structure, it saves space and is easy to operate. The new optimized design reduces the number of parts and makes the performance more stable and reliable.

2. The wheels are made of high-quality TPU, which has excellent corrosion resistance, anti-aging, and antibacterial properties. It is equipped with embedded spray-in double-sealed anti-rust deep groove ball precision silent bearings, which ensures smooth walking, flexible steering, and outstanding silent effects.

3. Combined with 30-degree and 45-degree short-stroke braking, it can achieve precise braking effects. It is equipped with its own anti-winding structure to effectively prevent dust and debris from entering and reduce maintenance costs.

Applications

Medical equipment, smart carts, precision instruments.



型号	档位						
Model	Gear	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Central Control Size 中控尺寸(mm)	Load Capacity 载重(kg)
S854U03	2档/3档	200	35	PU	232	φ28*98	150
S854U03	2档/3档	200	35	PU	232	φ32*50	150









型号	档位						
Model	Gear	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Central Control Size 中控尺寸(mm)	Load Capacity 载重(kg)
S554U01	2档/3档	125	70	PU	152	φ28*98	120
S654U01	2档/3档	125	70	PU	152	φ32*50	120
S654U01	2档/3档	150	80	PU	177	φ28*98	150
S654U01	2档/3档	150	80	PU	177	φ32*50	150

档位选择与分布

GEAR SELECTION AND DISTRIBUTION

两档分为30度和45度两种 The two gears are divided into 30 degrees and 45 degrees.
三档分为定向和非定向两种 Third gear is divided into directional and non-directional.

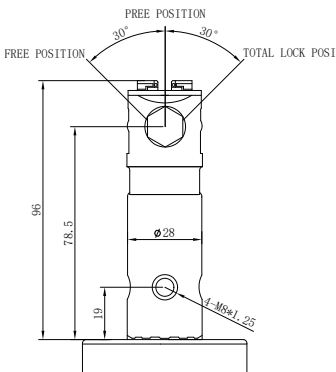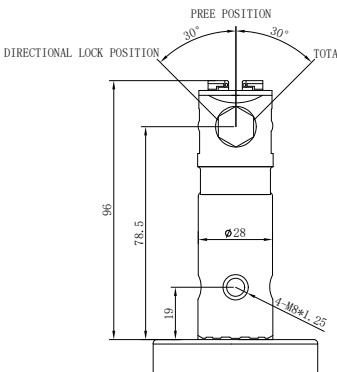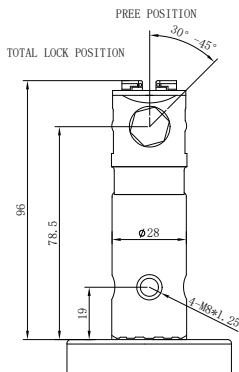

泰凯福®

T4
SERIES

产品特点

T4系列脚轮采用高强度尼龙材料注塑成型，耐磨耐冲击、承载能力强，兼具静音耐磨、转动轻巧灵活、弹性优异的特性。

1. 轮架主体：采用整体精钢压制框架，交叉缠绕铆接工艺，搭配滚珠轴承旋转头，结构稳固耐用；可选配丝杆、插杆、平板安装装置，适配多种安装场景。

2. 轮芯与轮面：采用增强型PP复合材料轮芯，搭配热塑性弹性体注塑轮胎面，灰色无压痕设计，保护地面不被划伤。

3. 轴承与配件：内置精密滚珠轴承，转动灵活静音；配有轮盖与刹车锁定装置，使用稳定可靠，兼具安全制动功能。

适用范围

适用于病床、仓储设备、精密仪器、商用设备等多种行业领域。



Product Features

T4 series casters are injection molded from high-strength nylon material, which is wear-resistant and impact-resistant, has strong load-bearing capacity, is quiet and wear-resistant, has light and flexible rotation, and excellent elasticity.

1. Main body of the wheel frame: It adopts an integral fine steel pressed frame, cross-wound riveting process, and is equipped with a ball bearing rotating head. The structure is stable and durable; optional screw rods, insert rods, and flat plate installation devices are available to adapt to a variety of installation scenarios.

2. Wheel core and wheel surface: it is made of reinforced PP core and thermoplastic rubber tread. The gray non-indentation design protects the ground from scratches.

3. Bearings and accessories: Built-in precision ball bearings, flexible and quiet rotation; equipped with wheel covers and brake locking devices, stable and reliable in use, and with safe braking function.

Applications

It is suitable for various industries such as hospital beds, storage equipment, precision instruments, and commercial equipment.

	型号								
	Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Plate Size 平板尺寸(mm)	Hole centres 孔距(mm)	Hole diameter 孔直径(mm)	Load Capacity 载重(kg)
	D3S1E03	75	22	TPE	117	92*65	75*44	8.5*12	70


	型号								
	Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Plate Size 平板尺寸(mm)	Hole centres 孔距(mm)	Hole diameter 孔直径(mm)	Load Capacity 载重(kg)
	D3D1E03	75	22	TPE	117	92*65	75*44	8.5*12	70


	型号						
	Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Threaded Stem Size 丝杆尺寸(mm)	Load Capacity 载重(kg)
	D4S2E03	100	23	TPE	140	M12*25	80

	型号						
	Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Threaded Stem Size 丝杆尺寸(mm)	Load Capacity 载重(kg)
	D4D2E03	100	23	TPE	140	M12*25	80

	型号						
	Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Stem Size 插杆尺寸(mm)	Load Capacity 载重(kg)
	D5S3E03	125	32	TPE	166	φ28*26	120

	型号						
	Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Stem Size 插杆尺寸(mm)	Load Capacity 载重(kg)
	D5D3E03	125	32	TPE	166	φ28*26	120

	型号								
	Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Plate Size 平板尺寸(mm)	Hole centres 孔距(mm)	Hole diameter 孔直径(mm)	Load Capacity 载重(kg)
	S4D1E02	100	69	TPE	125	92*65	74*44	8.5*12	90
	S5D1E02	125	77	TPE	154	92*65	74*44	8.5*12	125

	型号						
	Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Threaded Stem Size 丝杆尺寸(mm)	Load Capacity 载重(kg)
	S4D2E02	100	69	TPE	116	M12*25	90
	S5D2E02	125	77	TPE	145	M16*25	125

	型号						
	Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Stem Size 插杆尺寸(mm)	Load Capacity 载重(kg)
	S4D3E02	100	69	TPE	116	φ28*39	90
	S5D3E02	125	77	TPE	145	φ28*39	125

泰凯福®

T5
SERIES



产品特点

T5系列脚轮，专为医疗、办公及商用设备场景设计，兼具美学外观与可靠性能。

- 1. 材质与性能：采用TPE轮面材质，静音耐磨、无压痕不伤地面；搭配增强型结构，单轮载重可达60KG，承载稳定，使用寿命长。
- 2. 安装适配性：提供平底、丝杆、插杆三种主流安装方式，适配不同设备安装需求，安装便捷灵活。
- 3. 人性化安全设计：配备踩踏式刹车结构，刹车稳定可靠，锁定效果清晰；内置精密轴承，转动顺滑静音，满足医疗推车、电子设备等低噪音使用场景的需求。

适用范围

医疗仪器、电子推车、视听设备、办公设备等多种行业领域。

Product Features

T5 series casters are specially designed for medical, office and commercial equipment scenarios, with both aesthetic appearance and reliable performance.

- 1. Material and performance: Made of TPE material, it is silent and wear-resistant, has no indentation and floor protection with an enhanced structure, the load capacity of a single wheel can reach 60KG, with stable load-bearing and long service life.
- 2. Installation adaptability: It provides three mainstream installation methods: flat bottom, screw rod, and plug-in rod, adapting to the installation needs of different equipment, and the installation is convenient and flexible.
- 3. Humanized safety design: Equipped with a pedal-type brake structure, the brake is stable and reliable, and the locking effect is clear; built-in precision bearings rotate smoothly and silently, meeting the needs of low-noise usage scenarios such as medical carts and electronic equipment.

Applications

Medical instruments, electronic carts, audio-visual equipment, office equipment.

	型号								
	Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Plate Size 平板尺寸(mm)	Hole centres 孔距(mm)	Hole diameter 孔直径(mm)	Load Capacity 载重(kg)
	S2S1E03	50	52	TPE	66	42*42	32*32	φ5	60

	型号								
	Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Plate Size 平板尺寸(mm)	Hole centres 孔距(mm)	Hole diameter 孔直径(mm)	Load Capacity 载重(kg)
	S2P1E03	50	52	TPE	66	42*42	32*32	φ5	60

	型号						
	Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Threaded Stem Size 丝杆尺寸(mm)	Load Capacity 载重(kg)
	D3S2E02	75	32	TPE	115	M12*20	60

	型号						
	Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Threaded Stem Size 丝杆尺寸(mm)	Load Capacity 载重(kg)
	D3P2E02	75	32	TPE	115	M12*20	80

泰凯福®

T6 SERIES



产品特点

T6系列具有独特的美学设计、有效的静音特点和优良的防缠绕特性。期待能给您的高档医手设备，电子推车带来时尚外观，超长耐用等增值服务。产品符合欧标EN12530行业标准。

- 1、支架为高强度工程PA材料制成，支架转动结构采用标准轴承结构设计，使其具有超低的转向力，转向灵活、耐用。
- 2、人性化美学刹车设计，将刹车与解刹上下区分开更方便使用。
- 3、全包式的防缠绕设计，能有效抵挡头发、线物等缠绕，具有优良的防缠、防腐性能。
- 4、轮芯配置精密轴承、轮面采用静音TPR。让您在移动设备在过程中体验到轻松省力、灵活、静音。

适用范围

美容仪器、超声设备、医疗推车、点滴架等高端医疗仪器等多种行业领域。

Product Features

T6 series features unique aesthetic design, effective quietness and excellent anti-winding properties. We look forward to bringing value-added services such as fashionable appearance, ultra-long durability to your high-end medical hand equipment and electronic carts. The product meets the European standard EN12530 .

1. The bracket is made of high-strength engineering PA material. The rotating structure of the bracket adopts a standard bearing structure design, which makes it have ultra-low steering force, flexible steering and durability.
2. The humanized aesthetic brake design separates the upper and lower parts of the brake and brake release for easier use.
3. The all-inclusive anti-tangle design can effectively resist entanglement of hair, threads, etc., and has excellent anti-tangle and anti-corrosion properties.
4. The wheel core is equipped with precision bearings and the wheel surface adopts silent TPR. Allowing you to experience ease, effort, flexibility, and silence during the process on your mobile device.

Applications

Beauty equipment, ultrasound equipment, medical carts, drip stands and other high-end medical equipment.



型号						
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Threaded Stem Size 丝杆尺寸(mm)	Load Capacity 载重(kg)
S2S2E04	50	40	TPE	60	M12*20	40
S7S2E04	65	48	TPE	72	M12*20	50
S3S2E04	75	55	TPE	92	M12*20	60
S4S2E04	100	82	TPE	122	M12*20	80



型号						
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Threaded Stem Size 丝杆尺寸(mm)	Load Capacity 载重(kg)
S2P2E04	50	40	TPE	60	M12*20	40
S7P2E04	64	48	TPE	72	M12*20	50
S3P2E04	75	55	TPE	92	M12*20	60
S4P2E04	100	82	TPE	122	M12*20	80

泰凯福®

T7
SERIES



产品特点

T7系列脚轮，兼具轻盈质感与精致美学外观，同时拥有优异的静音耐磨性能，适配各类对颜值与实用性有双重要求的设备场景。

1. 中空美学设计：采用创新中空轮体结构，线条简洁利落，搭配黑白双色外观，自带现代简约质感，为设备增添时尚高级感，打破传统脚轮的笨重刻板印象。
2. 材质与性能：选用PU材质轮面，静音耐磨、顺滑不伤地面；中空结构在保证轮体强度的同时减轻自重，承载稳定可靠，兼顾颜值与实用性。
3. 安装与安全设计：提供丝杆、平板两种主流安装方式，安装便捷灵活；可选带刹车版本，锁定稳定清晰，内置精密轴承，转动顺滑低噪，适配办公设备、高端商用推车等场景。

适用范围

办公设备、医疗推车、视听设备、小型精密仪器等多种行业领域。

Product Features

T7 series casters have both light texture and exquisite aesthetic appearance, as well as excellent silent and wear-resistant performance. They are suitable for various equipment scenarios that have dual requirements for appearance and practicality.

1. Hollow aesthetic design: It adopts an innovative hollow wheel body structure with simple and neat lines. It has a black and white two-color appearance and a modern and simple texture. It adds a fashionable and high-end feel to the equipment and breaks the bulky stereotype of traditional casters.
2. Material and performance: The wheel surface is made of PU material, which is silent, wear-resistant, smooth and floor protection. The hollow structure ensures the strength of the wheel body while reducing its own weight, making the load-bearing stable and reliable, taking into account both appearance and practicality.
3. Installation and safety design: Two mainstream installation methods, screw rod and flat plate, are provided, which are convenient and flexible to install; optional version with brakes, stable and clear locking, built-in precision bearings, smooth rotation and low noise, suitable for office equipment, high-end commercial carts and other scenarios.

Applications

Office equipment, medical carts, audio-visual equipment, small precision instruments



型号						
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Threaded Stem Size 丝杆尺寸(mm)	Load Capacity 载重(kg)
S2S2U05	50	45	PU	64	M8*15	60
S7S2U05	60	47	PU	72	M8*15	70



型号						
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Threaded Stem Size 丝杆尺寸(mm)	Load Capacity 载重(kg)
S2P2U05	50	45	PU	64	M8*15	60
S7P2U05	65	47	PU	72	M8*15	70



型号								
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Plate Size 平板尺寸(mm)	Hole centres 孔距(mm)	Hole diameter 孔直径(mm)	Load Capacity 载重(kg)
S2S1U05	50	45	PU	70	42*42	32*32	φ5.2	60
S7S1U05	65	47	PU	76	42*42	32*32	φ5.2	70



型号								
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Plate Size 平板尺寸(mm)	Hole centres 孔距(mm)	Hole diameter 孔直径(mm)	Load Capacity 载重(kg)
S2P1U05	50	45	PU	70	42*42	32*32	φ5.2	60
S7P1U05	65	47	PU	76	42*42	32*32	φ5.2	70

泰凯福®

T8
SERIES



产品特点

T8系列具有独特的美学设计、有效的静音特点和优良的防缠绕特性等特点，期待能给您的高档医疗设备、电子推车等带来时尚外观、超长耐用等增值服务。

1、支架为高强度工程PA材料制成，搭配非标轴承的转盘结构，使其具有超低的转向力，达到转向灵活、更高载重、更耐撞击的优点。

2、轮子采用PP轮芯+TPR轮面制成，搭配精密国标轴承，轮子具有轻松的转动力，TPR轮面具有超静音特性。

3、全包式防缠绕设计，能有效的抵制地面上的毛线缠绕，获得更优良的防腐性能。

适用范围

医疗仪器、电子仪器、视听设备等多种行业领域。

Product Features

T8 series has unique aesthetic design, effective mute characteristics and excellent anti-winding properties. We look forward to bringing value-added services such as fashionable appearance and ultra-long durability to your high-end medical equipment, electronic carts, etc.


1. The bracket is made of high-strength engineering PA material and is equipped with a turntable structure with non-standard bearings, which enables it to have ultra-low steering force and achieve the advantages of flexible steering, higher load capacity, and greater impact resistance.

2. The wheels are made of PP core + TPR tread, and are equipped with precision national standard bearings. The wheels have easy turning force, and the TPR wheel surface has ultra-quiet characteristics.

3. The all-inclusive anti-winding design can effectively resist the entanglement of wool on the ground and obtain better anti-corrosion performance.

Applications

Medical instruments, electronic instruments, audio-visual equipment.



型号								
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Plate Size 平板尺寸(mm)	Hole centres 孔距(mm)	Hole diameter 孔直径(mm)	Load Capacity 载重(kg)
S3S1E06	75	60	TPE	94	70*58	54*40	8.5*12	70
S4S1E06	100	75	TPE	128	84*75	66*52	8.5*14	90



型号								
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Plate Size 平板尺寸(mm)	Hole centres 孔距(mm)	Hole diameter 孔直径(mm)	Load Capacity 载重(kg)
S3P1E07	75	60	TPE	94	70*58	54*40	8.5*12	70
S4P1E07	100	75	TPE	128	84*75	66*52	8.5*14	90



型号								
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Plate Size 平板尺寸(mm)	Hole centres 孔距(mm)	Hole diameter 孔直径(mm)	Load Capacity 载重(kg)
S3P1E06	75	60	TPE	94	70*58	54*40	8.5*12	70
S4P1E06	100	75	TPE	128	84*75	66*52	8.5*14	90



型号						
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Threaded Stem Size 丝杆尺寸(mm)	Load Capacity 载重(kg)
S3P2E07	75	60	TPE	90	M12*25	70
S4P2E07	100	75	TPE	121	M12*25	90



型号						
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Threaded Stem Size 丝杆尺寸(mm)	Load Capacity 载重(kg)
S3S2E06	75	60	TPE	90	M12*25	70
S4S2E06	100	75	TPE	121	M12*25	90



型号						
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Stem Size 插杆尺寸(mm)	Load Capacity 载重(kg)
S3P3E07	75	60	TPE	87	φ11*22	70



型号						
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Threaded Stem Size 丝杆尺寸(mm)	Load Capacity 载重(kg)
S3P2E06	75	60	TPE	90	M12*25	70
S4P2E06	100	75	TPE	121	M12*25	90

泰凯福®

T9
SERIES

产品特点

M2系列具有独特的美学设计、有效产品特点的静音特点和优良的防缠绕特性等特点，将刹车踏板与解刹踏板按两个踏板区分开设计，方便踩刹的人性化设计，期待能给您的高档医疗设备、电子仪器等带来时尚外观、超长耐用等增值服务。

1、支架为高强度工程PA材料制成，搭配标准轴承的转盘结构，使其具有超低的转向力，转向灵活、更高载重、更耐撞击的优点。

2、人性化美学的刹车设计，将刹车踏板与解刹踏板按上下大小区分开，更贴合人们的使用习惯。

3、轮子采用PP轮芯+TPR轮面制成，搭配精密国标轴承，轮子具有超低的转动力，TPR轮面具有超静音特性。

4、全包式防缠绕设计，能有效的抵制地面上的毛线缠绕，获得更优良的防腐性能。

适用范围

医疗仪器、食品工厂、高档餐厅移动推车等多种行业领域。



Product Features

T9 series has unique aesthetic design, effective product features, quiet features, and excellent anti-winding characteristics. The brake pedal and brake release pedal are designed as two separate pedals, which is a humanized design that facilitates braking. We look forward to bringing value-added services such as fashionable appearance and ultra-long durability to your high-end medical equipment, electronic instruments, etc.

1. The bracket is made of high-strength engineering PA material and is equipped with a turntable structure with standard bearings, giving it the advantages of ultra-low steering force, flexible steering, higher load capacity, and greater impact resistance.

2. The brake design with humanized aesthetics separates the brake pedal and brake release pedal according to their upper and lower sizes, which is more in line with people's usage habits.

3. The wheels are made of PP core + TPR tread, with precision national standard bearings. The wheels have ultra-low rotational force, and the TPR tread has ultra-quiet characteristics.

4. The all-inclusive anti-winding design can effectively resist the entanglement of wool on the ground and obtain better anti-corrosion performance.

Applications

Medical equipment, food factories, high-end restaurant mobile carts.



型号								
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Plate Size 平板尺寸(mm)	Hole centres 孔距(mm)	Hole diameter 孔直径(mm)	Load Capacity 载重(kg)
D3S1E04	75	26	TPE	112	70*58	55*40	8.5*12	60
D4S1E04	100	28	TPE	143	95*64	73*44	8.5*12	90
D5S1E04	125	32	TPE	172	95*64	73*44	8.5*12	110



型号								
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Plate Size 平板尺寸(mm)	Hole centres 孔距(mm)	Hole diameter 孔直径(mm)	Load Capacity 载重(kg)
D3D1E04	75	26	TPE	112	70*58	55*40	8.5*12	60
D4D1E04	100	28	TPE	143	95*64	73*44	8.5*12	90
D5D1E04	125	32	TPE	172	95*64	73*44	8.5*12	110



型号						
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Threaded Stem Size 丝杆尺寸(mm)	Load Capacity 载重(kg)
D3S2E04	75	26	TPE	107	M12*25	60
D4S2E04	100	28	TPE	139	M12*25	90
D5S2E04	125	32	TPE	164	M12*25	110



型号						
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Threaded Stem Size 丝杆尺寸(mm)	Load Capacity 载重(kg)
D3D2E04	75	26	TPE	107	M12*25	60
D4D2E04	100	28	TPE	139	M12*25	90
D5D2E04	125	32	TPE	164	M12*25	110

泰凯福®

T10
SERIES

产品特点

M3系列具有独特的美学设计、有效的静音特点和优良的防缠绕特性等特点，期待能给您的高档医疗设备、高档家具等带来时尚外观、经济耐用等增值服务。

1、支架为高强度工程PA材料制成，搭配非标轴承的转盘结构，使其具有超低的转向力，转向灵活、更高载重、更耐撞击的优点。


2、人性化美学的刹车设计，将刹车与解刹上下区分开，更方便使用。

3、轮子采用PP轮芯+TPR轮面制成，轮芯内置高强工程PA材料轴套，轮子不易腐蚀生锈且轮子具有超低的转动力、TPR轮面具有超静音特性。

4、全包式防缠绕设计，能有效的抵制地面上的毛线缠绕，获得更优良的防腐性能。

适用范围

医疗仪器、美容仪器、高档家具等多种行业领域。

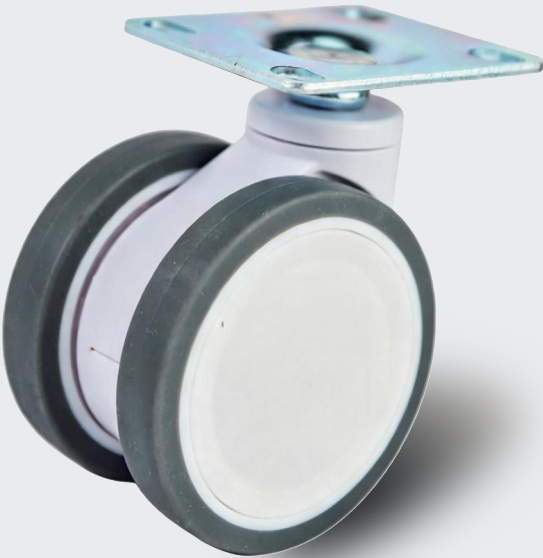

Product Features

T10 series has unique aesthetic design, effective mute characteristics and excellent anti-winding properties. We look forward to bringing value-added services such as fashionable appearance, economy and durability to your high-end medical equipment, high-end furniture, etc.

1. The bracket is made of high-strength engineering PA material and has a turntable structure with non-standard bearings, giving it the advantages of ultra-low steering force, flexible steering, higher load capacity, and greater impact resistance.


2. The brake design with humanized aesthetics separates the braking and releasing of the brakes from the upper and lower parts, making it more convenient to use.

3. The wheel is made of PP core + TPR tread. The core has a built-in high-strength engineering PA material bushing. The wheel is not easy to corrode and rust, and the wheel has ultra-low turning force. The TPR tread has ultra-quiet characteristics.

4. The all-inclusive anti-winding design can effectively resist the entanglement of wool on the ground and obtain better anti-corrosion performance.

Applications

Medical equipment, beauty equipment, high-end furniture.



型号								
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Plate Size 平板尺寸(mm)	Hole centres 孔距(mm)	Hole diameter 孔直径(mm)	Load Capacity 载重(kg)
S7S1E08	63	55	TPE	84	60*50	45*32	6.5*9	40
S3S1E08	75	59	TPE	97	70*58	55*40	8.5*12	50
S4S1E08	100	71	TPE	128	84*75	65*53	8.5*14	80



型号								
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Plate Size 平板尺寸(mm)	Hole centres 孔距(mm)	Hole diameter 孔直径(mm)	Load Capacity 载重(kg)
S7P1E08	63	55	TPE	84	60*50	45*32	6.5*9	40
S3P1E08	75	59	TPE	97	70*85	52*40	8.5*12	50
S4P1E08	100	71	TPE	128	84*75	64*52	8.5*14	80



型号						
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Threaded Stem Size 丝杆尺寸(mm)	Load Capacity 载重(kg)
S7S2E08	63	55	TPE	79	M12*25	40
S3S2E08	75	59	TPE	90	M12*25	50
S4S2E08	100	71	TPE	121	M12*25	80



型号						
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Threaded Stem Size 丝杆尺寸(mm)	Load Capacity 载重(kg)
S7P2E08	63	55	TPE	79	M12*25	40
S3P2E08	75	59	TPE	90	M12*25	50
S4P2E08	100	71	TPE	121	M12*25	80



泰凯福®

T11
SERIES



产品特点

M5系列具有独特的美学设计、有效的静音特点和优良的防缠绕特性等特点，期待能给您的高档医疗设备、电子仪器等带来时尚外观、超长耐用等增值服务。

- 1、支架为高强度工程PA材料制成，搭配上下波盘结构，使其具有超低的转向力，转向灵活、更高载重、更耐撞击的优点。
- 2、轮子采用PP轮芯+TPR轮面制成，搭配精密国标轴承，轮子具有超低的转动力，TPR轮面具有超静音特性。
- 3、全包式防缠绕设计，能有效的抵制地面上的毛线缠绕，获得更优良的防腐性能。

适用范围

医疗仪器、电子仪器、视听设备等多种行业领域。

Product Features

T11 series has unique aesthetic design, effective mute characteristics and excellent anti-winding characteristics. We look forward to bringing value-added services such as fashionable appearance and long durability to your high-end medical equipment and electronic instruments.

1. The bracket is made of high-strength engineering PA material, with an upper and lower corrugated plate structure, giving it the advantages of ultra-low steering force, flexible steering, higher load capacity, and greater impact resistance.
2. The wheels are made of PP core + TPR tread, with precision national standard bearings. The wheels have ultra-low rotational force, and the TPR wheel surface has ultra-quiet characteristics.
3. The all-inclusive anti-winding design can effectively resist the entanglement of wool on the ground and obtain better anti-corrosion performance.

Applications

Medical instruments, electronic instruments, audio-visual equipment.



型号								
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Plate Size 平板尺寸(mm)	Hole centres 孔距(mm)	Hole diameter 孔直径(mm)	Load Capacity 载重(kg)
S3S1E09	75	58	TPE	104	70*58	52*42	φ8.5	60



型号								
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Plate Size 平板尺寸(mm)	Hole centres 孔距(mm)	Hole diameter 孔直径(mm)	Load Capacity 载重(kg)
S3P1E09	75	58	TPE	104	70*58	52*42	φ8.5	60



型号						
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Threaded Stem Size 丝杆尺寸(mm)	Load Capacity 载重(kg)
S3S2E09	75	58	TPE	95	M12*25	60



型号						
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Threaded Stem Size 丝杆尺寸(mm)	Load Capacity 载重(kg)
S3P2E09	75	58	TPE	95	M12*25	60



型号						
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Stem Size 插杆尺寸(mm)	Load Capacity 载重(kg)
S3S3E09	75	58	TPE	92	φ11*22	60



型号						
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Stem Size 插杆尺寸(mm)	Load Capacity 载重(kg)
S3P3E09	75	58	TPE	92	φ11*22	60

泰凯福®

T12
SERIES



产品特点

M6系列具有独特的美学设计、有效的产品特点:静音特点和优良的防缠绕特性。期待能给您的高档医疗设备,电子推车带来时尚外观,超长耐用等增值服务。产品符合欧标EN12530行业标准。

1、支架为高强度工程PA材料制成,支架转动结构配置了单轴承和双轴承两种设计,以满足客户的不同需求。

2、采用人性化双踏板刹车与解刹设计,刹车与解刹轻松省力;且最大化保护医护人员脚踩刹车过程中不与设备发生干涉碰撞。

3、全包式的防缠绕设计,能有效抵挡头发、线物等缠绕,具有优良的防缠、防腐性能。

4、轮芯配置精密轴承、轮面采用静音TPR。让您在移动设备在过程中体验到轻松省力、灵活、静音。

适用范围

呼吸机、超声设备、麻醉机、医疗推车等高端精密医疗设备等多种行业领域。

Product Features

T12 series boasts a unique aesthetic design and effective features: quiet operation and excellent anti-tangling properties. We aim to bring a stylish appearance and enhanced durability to your high-end medical equipment and electronic trolleys. The product meets the European standard EN12530.

1. The bracket is made of high-strength engineering PA material. The bracket's rotating structure is available in both single-bearing and double-bearing designs to meet different customer needs.


2. It adopts a user-friendly dual-pedal braking and releasing design, making braking and releasing easy and effortless; it also maximizes protection for medical personnel, preventing interference and collision between their feet and the equipment during braking.

3. The fully enclosed anti-tangling design effectively prevents entanglement by hair, wires, etc., providing excellent anti-tangling and anti-corrosion performance.

4. The wheel core is equipped with precision bearings, and the wheel surface uses silent TPR. This allows you to experience easy, effortless, flexible, and quiet operation during mobile equipment movement.


Applications

Suitable for various industries including ventilators, ultrasound equipment, anesthesia machines, medical trolleys, and other high-end precision medical equipment.

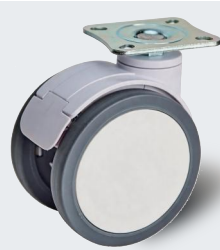	型号								
	Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Plate Size 平板尺寸(mm)	Hole centres 孔距(mm)	Hole diameter 孔直径(mm)	Load Capacity 载重(kg)
	SS51E10	125	90	TPE	115	84*75	65*52	8.5*14	110

	型号								
	Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Plate Size 平板尺寸(mm)	Hole centres 孔距(mm)	Hole diameter 孔直径(mm)	Load Capacity 载重(kg)
	SSD1E10	125	90	TPE	115	84*75	65*52	8.5*14	110

	型号						
	Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Threaded Stem Size 丝杆尺寸(mm)	Load Capacity 载重(kg)
	SS52E10	125	90	TPE	146	M16*30	110

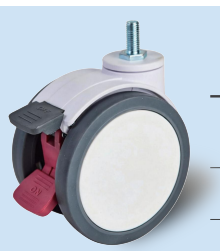	型号						
	Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Threaded Stem Size 丝杆尺寸(mm)	Load Capacity 载重(kg)
	SSD2E10	125	90	TPE	146	M16*30	110

	型号						
	Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Hole Diameter 顶孔尺寸(mm)	Load Capacity 载重(kg)
	SS56E10	125	90	TPE	146	φ12	110

	型号						
	Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Hole Diameter 顶孔尺寸(mm)	Load Capacity 载重(kg)
	SSD6E10	125	90	TPE	146	φ12	110

泰凯福®

T13
SERIES

产品特点

本系列专为高端医疗设备场景设计，兼具医用级洁净外观与稳定耐用的性能，适配推车移动的低噪音、高承重需求。

1. 医用级外观与设计：采用一体化白色轮架设计，线条流畅柔和，搭配浅灰色TPE轮面，整体风格洁净清爽，契合医疗环境的美学标准，同时无突出毛刺，避免刮蹭设备或人员。
2. 材质与性能：选用TPE热塑性弹性体轮面，静音耐磨、减震效果优异，移动顺滑不扰环境；大轮径设计，通过性更强，单轮载重可达100KG，承重稳定，使用寿命长，可做整体防静电。
3. 安装适配性：提供多种丝杆规格可选，适配不同医疗推车的安装需求，安装便捷稳固，满足设备的长期移动使用场景。

适用范围

医疗推车、护理设备、医用仪器推车、高端商用推车等行业领域。



Product Features

T13 series is specifically designed for high-end medical equipment scenarios, combining a medical-grade clean appearance with stable and durable performance, meeting the low-noise and high-load-bearing requirements of trolley movement.

1. Medical-grade Appearance and Design: Features an integrated white wheel frame design with smooth, flowing lines, paired with light gray TPE tread. The overall style is clean and refreshing, conforming to the aesthetic standards of the medical environment, while eliminating protruding burrs to prevent scratches to equipment or personnel.
2. Material and Performance: Utilizes thermoplastic rubber tread, offering quiet operation, wear resistance, and excellent shock absorption, ensuring smooth movement without disturbing the environment. The large wheel diameter design enhances maneuverability, with a single wheel capable of carrying up to 100KG, providing stable load-bearing capacity, long service life, and the option for overall anti-static coating.
3. Installation Compatibility: Offers various screw specifications to adapt to different medical trolley installation requirements, ensuring convenient and secure installation, meeting the needs of long-term mobile use.

Applications

Medical trolleys, nursing equipment, medical instrument trolleys, high-end commercial trolleys.



型号						
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Stem Size 插杆尺寸(mm)	Load Capacity 载重(kg)
D5S3E11 (50S54SX559E)	125	32	TPE	160	21.7*21.7*53	100



型号						
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Stem Size 插杆尺寸(mm)	Load Capacity 载重(kg)
D5P3E11 (50S44SX559E)	125	32	TPE	160	21.7*21.7*53	100



型号						
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Threaded Stem Size 丝杆尺寸(mm)	Load Capacity 载重(kg)
D5S2E11 (50S52SX559E)	125	32	TPE	160	1/2-13unc	100



型号						
Model	Wheel Dia 轮直径(mm)	Wheel Width 轮宽(mm)	Wheel Material 轮子材质	Load Height 安装高度(mm)	Threaded Stem Size 丝杆尺寸(mm)	Load Capacity 载重(kg)
D5P2E11 (50S42SX559E)	125	32	TPE	160	1/2-13unc	100